

HX14KG2091G SP4T Switch

1. Description

ID	Items	Specifications
1-1	Type	Absorptive SP4T Switch
1-2	Frequency Range	0.2 ~ 43.5GHz
1-3	Isolation	≥70dB
1-4	Insertion Loss	≤4.5dB@0.2 ~ 20GHz ≤6.5dB@20 ~ 40GHz ≤7.0dB@20 ~ 43.5GHz
1-5	VSWR	≤2.8
1-6	Impedance	50Ω
1-7	RF Input Power	23dBm
1-8	Switching Speed	≤150ns
1-9	Input/Output Connectors	2.92mm-F
1-10	Control Connectors	Φ0.8mm Glass Bead
1-11	Control	TTL=0 ~ 0.8V/3.3 ~ 5V
1-12	DC Power Supply	+5V/≤200mA

2. Environmental Specifications


ID	Items	Specifications
2-1	Operational Temperature	-40°C ~ +70°C
2-2	Storage Temperature	-55°C ~ +85°C

3. Truth Table

ID	E3	E2	E1	Signal Path State
3-1	0	0	0	J0→J1
	0	0	1	J0→J2
	0	1	0	J0→J3
	0	1	1	J0→J4
	1	X	X	Shut Down All

4. Outline Drawing

ID	Items	Specifications
4-1	Outline Drawing	Unit: mm
Tolerances:±0.1mm		

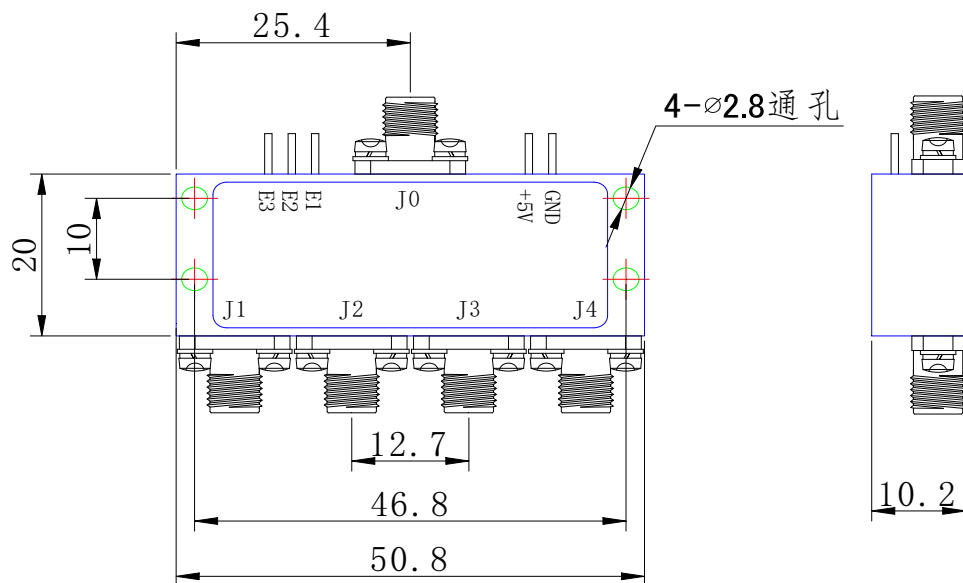

4-2	Material	Aluminum
4-3	Finish	Natural Color
4-4	Weight	/

NOTE: ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.