

# HXPA2892G Power Amplifier

## 1. Description

ID	Items	Specifications
1-1	Type	Power Amplifier
1-2	Frequency Range	18 ~ 40GHz
1-3	Gain	≥45dB
1-4	Gain Flatness	≤±2.5dB
1-5	Output 1dB Compression Point(P1dB)	≥28dBm Typical
1-6	Saturated Output Power(Psat)	/
1-7	Input VSWR	≤2.0
1-8	Isolation S12	≥65dB
1-9	Spurious	≤-60dBc
1-10	Noise Figure	4.0 Typical
1-11	Impedance	50Ω
1-12	Input/Output Connectors	2.92mm-F
1-13	DC Power Supply	+24V/≤500mA
1-14	TTL Control	0 ~ 0.8V=ON/3.3 ~ 5V=OFF

## 2. Absolute Maximum Ratings


ID	Parameter	Rating
2-1	Operating Voltage	24 ~ 28V
2-2	RF Input Power	≤15dBm

## 3. Environmental Specifications

ID	Items	Specifications
3-1	Operational Temperature	-40°C ~ +70°C
3-2	Storage Temperature	-55°C ~ +85°C

## 4. Outline Drawing

ID	Items	Specifications
4-1	Outline Drawing	Unit: mm
Tolerances:±0.1mm		

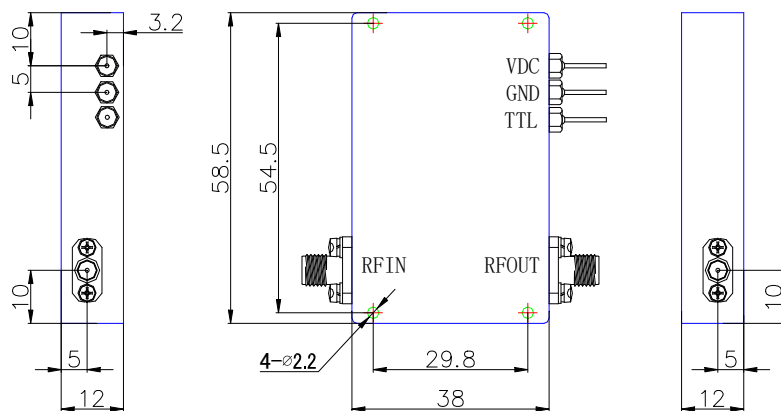

4-2	Material	Aluminum
4-3	Finish	Natural Color
4-4	Weight	70g

NOTE: ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.