


HX416KGZH3081G Switch Matrix

1. Functional Block Diagram

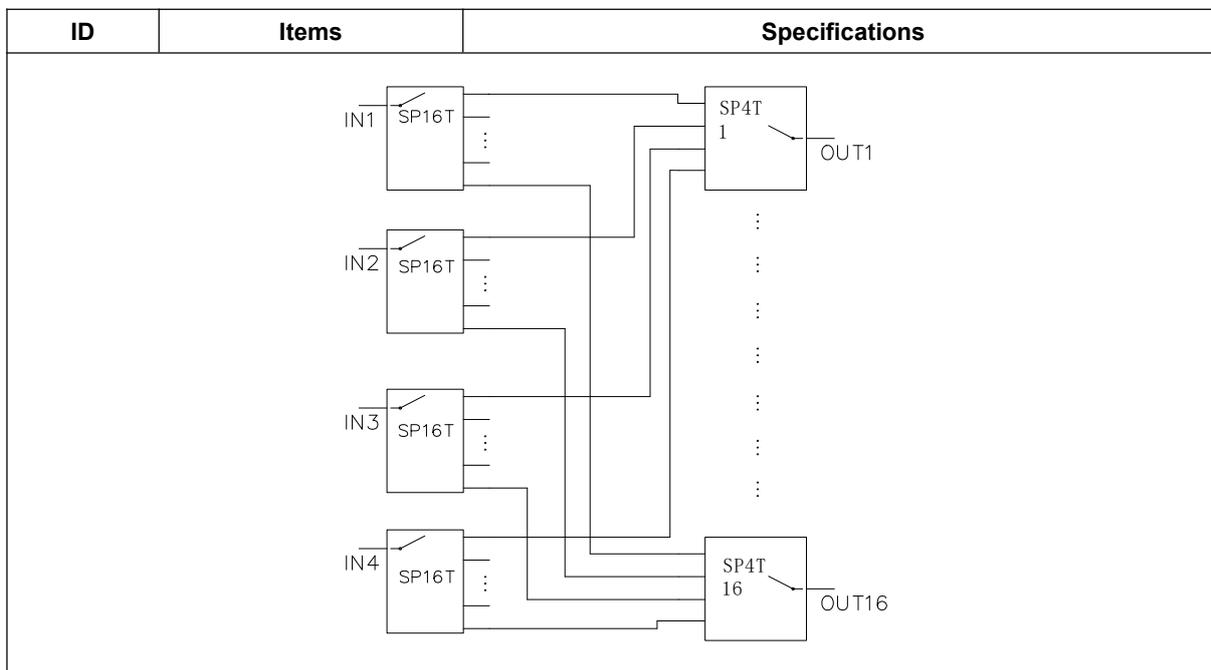


2. Description

ID	Items	Specifications
2-1	Type	4*16 Switch Matrix
2-2	Frequency Range	0.4 ~ 6GHz
2-3	Input	4 Ports
2-4	Output	16 Ports
2-5	Isolation	≥80dB
2-6	Insertion Loss	≤4dB
2-7	VSWR	≤1.8
2-8	Impedance	50Ω
2-9	RF Input Power	2W
2-10	Switching Speed	≤1ms
2-11	Input/Output Connectors	SMA-F
2-12	Control Connectors	RJ45
2-13	Power Supply	220V±20%/AC

3. Environmental Specifications

ID	Items	Specifications
3-1	Operational Temperature	-20°C ~ +60°C
3-2	Storage Temperature	-40°C ~ +70°C

4. Outline Drawing

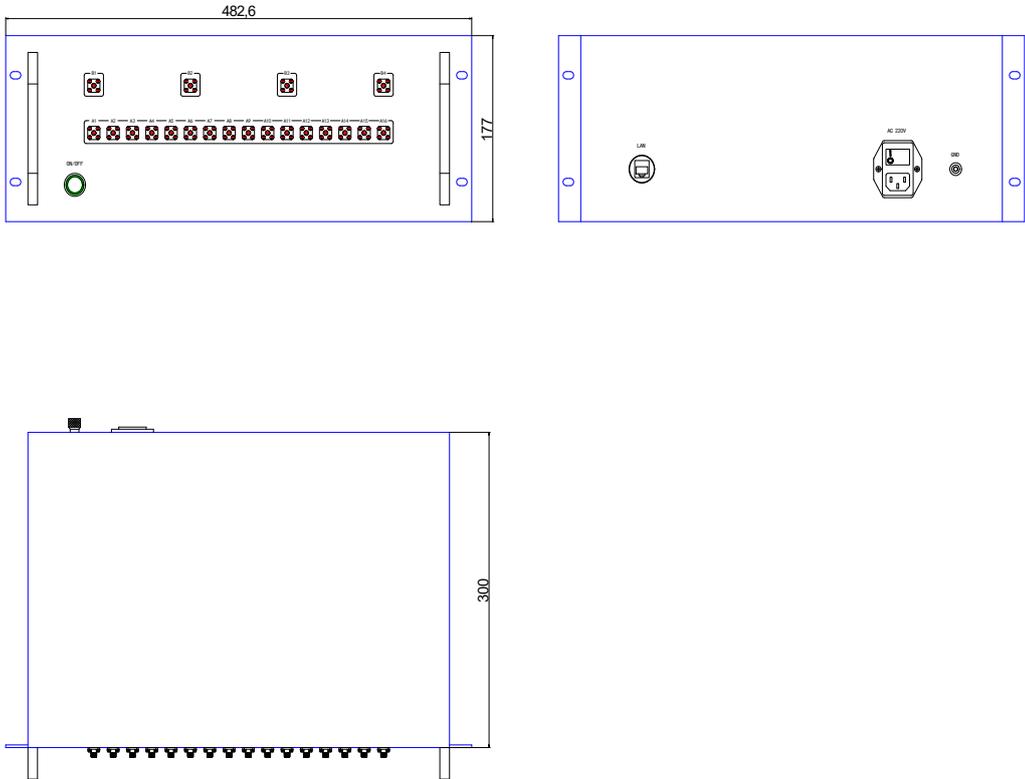ID	Items	Specifications
4-1	Outline Drawing	4U*19inch*300,Unit: mm
<p>Tolerances:±0.1mm</p> 		
4-2	Material	Aluminum
4-3	Finished	White Paint
4-4	Weight	/

5. Packing List

ID	Packing List	QTY
5-1	Power Cord	1
5-2	Operation Instruction	1
5-3	Test Report	1

NOTE: ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.