

HXAT1093G Digital Attenuator


1. Description

ID	Items	Specifications
1-1	Type	Digital Attenuator
1-2	Frequency Range	1MHz ~ 20GHz
1-3	Attenuation Range	0 ~ 95.5dB
1-4	Control Step Size	0.5dB
1-5	Attenuation Accuracy	$\leq \pm 1.2\text{dB}@32\text{dB}$ Typical
1-6	Insertion Loss	$\leq 8.0\text{dB}@6\text{GHz}$ Typical $\leq 9.0\text{dB}@12\text{GHz}$ Typical $\leq 11.0\text{dB}@20\text{GHz}$ Typical
1-7	VSWR	≤ 2.5
1-8	Impedance	50 Ω
1-9	RF Input Power	+24dBm
1-10	Switching Speed	$\leq 200\text{ns}$
1-11	Input/Output Connectors	SMA-F
1-12	Control Connector	J30J-15ZKP
1-13	Control	TTL=0V/3.3V ~ 5V
1-14	DC Power Supply	+5V/ $\leq 50\text{mA}$

2. Environmental Specifications

ID	Items	Specifications
2-1	Operational Temperature	-40 $^{\circ}\text{C}$ ~ +70 $^{\circ}\text{C}$
2-2	Storage Temperature	-55 $^{\circ}\text{C}$ ~ +85 $^{\circ}\text{C}$

3. Interface

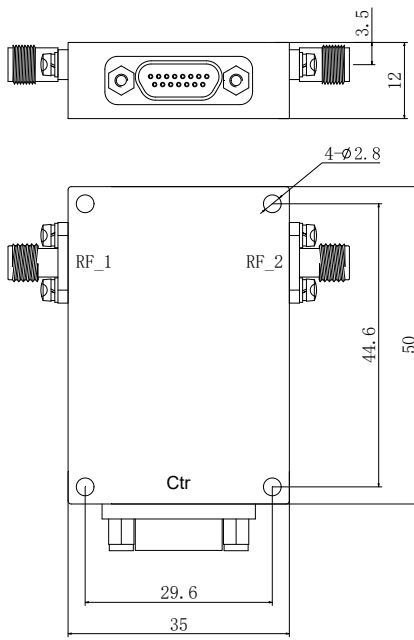
ID	Items	Specifications
3-1	Control Connector	J30J-15ZKP
		
3-2	NO	Specifications
	1	D0
	2	D1
	3	D2
	4	D3
	5	D4
	6	D5
	7	D6
	8	D7

	9~13	NC
	14	+5V
	15	GND

4. Truth Table

ID	D0	D1	D2	D3	D4	D5	D6	D7	Attenuation Value
4-1	0	0	0	0	0	0	0	0	0dB
	1	0	0	0	0	0	0	0	0.5dB
	0	1	0	0	0	0	0	0	1dB
	0	0	1	0	0	0	0	0	2dB
	0	0	0	1	0	0	0	0	4dB
	0	0	0	0	1	0	0	0	8dB
	0	0	0	0	0	1	0	0	16dB
	0	0	0	0	0	0	1	0	32dB
	0	0	0	0	0	0	0	1	32dB
	1	1	1	1	1	1	1	1	63.5dB

5. Outline Drawing

ID	Items	Specifications
5-1	Outline Drawing	Unit: mm
Tolerances: $\pm 0.2\text{mm}$ 		
5-2	Material	Aluminum
5-3	Finish	Nickel Plated
5-4	Weight	60g

6. Packing List

ID	Packing List	QTY
----	--------------	-----

6-1	J30J-15TJL	1
-----	------------	---

7. Note

7-1	Should be take the ESD protection during use .
7-2	Exceeding the rated input power limit may cause the product to burn out.
7-3	The RF port must not be subjected to direct current bias voltage.
7-4	Avoid using in extreme temperature, humidity, or corrosive environments.
7-5	Good grounding can reduce EMI and RFI.
7-6	All specifications are subject to change without notice at any time.