

HX16KG3081G SP6T Switch


1. Description

ID	Items	Specifications
1-1	Type	Absorptive High Isolation SP6T Switch
1-2	Frequency Range	0.4 ~ 6GHz
1-3	Isolation	≥120dB
1-4	Insertion Loss	≤3.0dB
1-5	VSWR	≤1.6
1-6	Impedance	50Ω
1-7	RF Input Power	2W
1-8	Switching Speed	≤200ns
1-9	Input/Output Connectors	SMA-F
1-10	Control Connectors	JL4-8ZJW (Mating Outlet JL4-8TKH)
1-11	Control	TTL=0 ~ 0.8V/3.3 ~ 5V
1-12	DC Power Supply	+5V/≤250mA; -5V/≤100mA

2. Environmental Specifications

ID	Items	Specifications
2-1	Operational Temperature	-40°C ~ +70°C
2-2	Storage Temperature	-55°C ~ +85°C

3. Interface

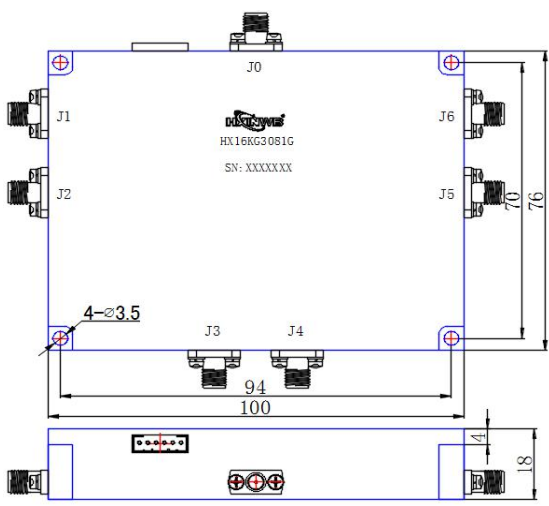
ID	Items	Specifications
3-1	Control Connectors	JL4-8ZJW
		
3-2	NO	Specifications
	1	+5
	2	GND
	3	-5V
	4	C1
	5	C2
	6	C3
	7	NC
	8	NC

4. Truth Table

ID	C3	C2	C1	Signal Path State
4-1	0	0	0	J0→J1
	0	0	1	J0→J2

	0	1	0	J0→J3
	0	1	1	J0→J4
	1	0	0	J0→J5
	1	0	1	J0→J6

5. Outline Drawing

ID	Items	Specifications
5-1	Outline Drawing	Unit: mm
<p>Tolerances:±0.1mm</p> 		
5-2	Material	Aluminum
5-3	Finish	Nickel Plated
5-4	Weight	/

NOTE: ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.