

HX112KG4082G SP12T Switch

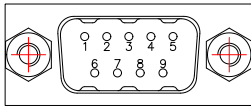
1. Description

NO	Items	Specifications
1-1	Type	Reflective SP12T Switch
1-2	Frequency Range	300KHz ~ 8GHz
1-3	Isolation	≥50dB
1-4	Insertion Loss	≤5.5dB Typical
1-5	VSWR	≤1.6
1-6	Impedance	50Ω
1-7	RF Input Power	24dBm
1-8	Switching Speed	≤500ns
1-9	Input/Output Connectors	SMA-F
1-10	Control Connectors	DB9-Male
1-11	Control	TTL=0 ~ 0.8V/3.3 ~ 5V
1-12	DC Power Supply	+5V/≤150mA

2. Environmental Specifications

NO	Items	Specifications
2-1	Operational Temperature	-40°C ~ +70°C
2-2	Storage Temperature	-55°C ~ +85°C

3. Interface

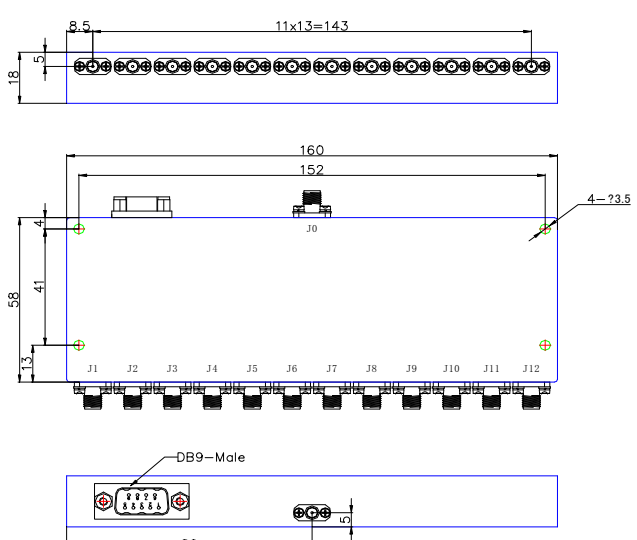
NO	Items	Specifications
3-1	Control Connectors	DB9-Male
		
3-2	NO	Specifications
	1	C1
	2	C2
	3	C3
	4	C4
	5	NC
	6	NC
	7	+5V
	8	NC
	9	GND

4. Truth Table

NO	C4	C3	C2	C1	Signal Path State
----	----	----	----	----	-------------------

4-1	0	0	0	0	J0→J1
	0	0	0	1	J0→J2
	0	0	1	0	J0→J3
	0	0	1	1	J0→J4
	0	1	0	0	J0→J5
	0	1	0	1	J0→J6
	0	1	1	0	J0→J7
	0	1	1	1	J0→J8
	1	0	0	0	J0→J9
	1	0	0	1	J0→J10
	1	0	1	0	J0→J11
	1	0	1	1	J0→J12
	1	1	0	0	Shut Down All

5. Outline Drawing

NO	Items	Specifications
5-1	Outline Drawing	Unit: mm
<p>Tolerances:±0.1mm</p>  <p>The drawing includes three views: a top view showing a rectangular component with dimensions 11x1.3=14.3 and 1.8; a side view showing a profile with dimensions 160, 152, 4, 58, 41, 1.3, and 4, and a label 4-∅3.5; and a detail view of a DB9-Male connector with a width of 80 and a height of 5.</p>		
5-2	Material	Aluminum
5-3	Finish	Nickel Plated
5-4	Weight	/

NOTE: ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.